





Load Chart / 载荷曲线

R (m)														
80	20,6 18000	24,0 15175	30,0 11750	37,7 9000	38,7 9000	44,0 7825	50,0 6795	54,0 6240	60,0 5550	64,0 5160	70,0 4660	74,0 4375	80,0 4000	m kg
74	20,6 18000	24,0 15170	30,0 11745	37,7 9000	38,9 9000	44,0 7865	50,0 6835	54,0 6275	60,0 5580	64,0 5190	70,0 4690	74,0 4400	m kg	
70		25,6 18000	30,0 15035	34,0 13045	40,0 10830	46,9 9000	49,1 9000	54,0 8115	60,0 7230	64,0 6735	70,0 6100	m kg		
64		25,3 18000	30,0 14885	34,0 12915	40,0 10720	46,5 9000	48,9 9000	54,0 80700	60,0 7195	64,0 6700	m kg			
60			30,7 18000	34,0 16045	40,0 13370	44,0 12005	50,0 10375	56,5 9000	60,0 9000	m kg				
50			30,6 18000	34,0 16000	40,0 13335	44,0 11970	50,0 10500	m kg						
40			30,6 18000	34,0 16020	40,0 13600	m kg								








Load Chart Powerlift / 载荷曲线 Powerlift

R (m)														
80	22,0 18000	25,0 15630	30,0 12700	35,0 10630	40,3 9000	42,0 9000	50,0 7440	54,0 6840	60,0 6080	64,0 5660	70,0 5120	74,0 4810	80,0 4400	m kg
74	22,1 18000	25,0 15660	30,0 12720	35,0 10650	40,4 9000	42,2 9000	50,0 7490	54,0 6880	60,0 6120	64,0 5700	70,0 5150	74,0 4840	m kg	
70		27,5 18000	30,0 16350	35,0 13750	40,0 11800	45,0 10320	50,6 9000	54,5 9000	60,0 7940	64,0 7400	70,0 6710	m kg		
64		27,3 18000	30,0 16220	35,0 13630	40,0 11700	45,0 10230	50,5 9000	53,3 9000	60,0 7910	64,0 7370	m kg			
60			33,2 18000	35,0 17020	40,0 14670	45,0 12840	50,0 11410	54,0 10430	60,0 9350	m kg				
50			33,5 18000	35,0 17000	40,0 14650	45,0 12830	50,0 11550	m kg						
40			33,3 18000	35,0 17050	40,0 14960	m kg								







Mechanisms / 机构





For mechanisms with high drum capacity,
request wirerope loads deduction.
使用大容量绳机构，起升载荷需考虑扣除钢丝绳的重量。




POWER / 功率				Operating voltage / 工作电压	Generator / 发电机
Hoist / 起升机构	Trolley / 变幅机构	Slewing / 回转机构	Travel / 行走机构	380 V 3ph 50 Hz	160 kVA
HFU2-45-45	TFU-7.5	(4x) SWR-12	(2x) RT-7.5		200 kVA
HFU2-65-45			(4x) RT-7.5		250 kVA
HFU4-80-45					

Optional 选项
*

Heights Under Hook / 吊钩以下高度

∅ 2.5 m

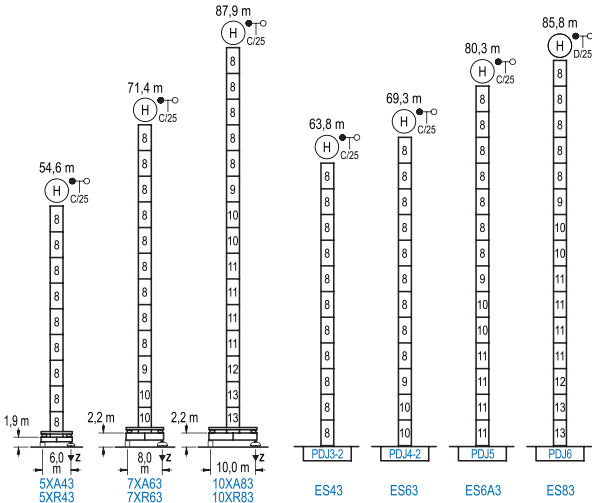


n°	Ref.	∅	h
8	DJ33	2,5	5,5
9	TDJ34	2,5	5,5
10	DJ34	2,5	5,5
11	DJ35	2,5	5,5
12	TDJ36B	2,5	5,5
13	DJ36	2,5	5,5

R max. 最大压力	In operation 工作状态	5XR43..... 136 t 7XR63..... 125 t 10XR83..... 133 t
	Out of service 非工作状态	5XR43..... 102 t 7XR63..... 141 t 10XR83..... 188 t

Other wind zones or additional hook heights on request
其他风区或另外的吊钩高度请咨询


Internal Climbing Crane / 内爬塔机



	5XA43	7XA63	10XA83
A max	40,4	57,2	73,7
A min	23,9	24,2	62,7
B max	33,0	33,0	33,0
B min	- 16,5	- 16,5	- 16,5
C max	52,7	47,2	47,2
C min	47,2	47,2	47,2
H max	93,1	120,6	137,4
H min	120,9	137,4	163,9

	ES43		ES63		ES6A3		ES83	
A max	49,6		55,1		66,1		71,6	
A min	22,1		22,1		44,1		60,6	
B max	-	33,0	-	33,0	-	33,0	-	33,0
B min		16,5		16,5		16,5		16,5
C max	47,2	47,2	47,2	47,2	47,2	47,2	47,2	47,2
H max	96,8	129,8	102,3	135,3	113,3	146,3	118,8	151,8


Other wind zones or additional hook heights on request
其他风区或另外的吊钩高度请咨询



	Hs < 400 m	
	A max (m)	A min (m)
62,0 m 5x TDJ33 + TDJ34 + 4x TDJ34A + CLDJ34A	21,9	10,0
56,5 m 4x TDJ33 + TDJ34 + 4x TDJ34A + CLDJ34A	19,1	8,0
51,0 m 3x TDJ33 + TDJ34 + 4x TDJ34A + CLDJ34A	16,4	8,0

Special Heights / 外附着塔机

Ø 4.0 m

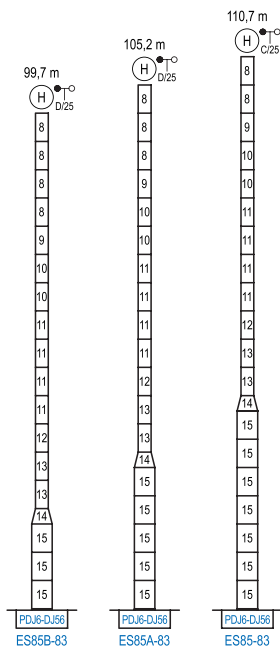

			
n°	Ref.	l (m)	h (m)
8	DJ33	2,5	5,5
9	TDJ34	2,5	5,5
10	DJ34	2,5	5,5
11	DJ35	2,5	5,5
12	TDJ36B	2,5	5,5
13	DJ36	2,5	5,5
14	TDJ56DJ36	4,0	3,0
15	DJ56	4,0	5,5

Other wind zones or additional hook heights on request
其他风区或另外的吊钩高度请咨询



COMANSA CM
COMANSA CONSTRUCTION
MACHINERY (HANGZHOU) CO., LTD.

科曼萨建设机械(杭州)有限公司
电话 / Tel: +86-571-8299 9999
传真 / Fax: +86-571-8299 6555
www.comansacm.com.cn
sales@comansacm.com.cn
中国杭州 · 萧山靖江 311223
Jingjiang, Xiaoshan, Hangzhou, China

CM-DS-201610-016

21 CM 550 18 t

Subject to modifications. 保留修改权利，恕不另行通知。