


LOAD CHART / 载荷曲线








R (m)	ψ	RC _{max} (m)	10	15	20	25	30	35	40	45	50	55	60	Δ _h (m) Δ _h (kg)
60		23,5			9000	7910	5550	4200	3310	2690	2220	1860	1550	
55		24,8			9000	8870	6430	4970	3990	3280	2740	2300		
50		25,9				9000	7110	5580	4540	3760	3150			
45		27,2				9000	7710	6070	4920	4050				
40		27,7				9000	8040	6460	5300					
35		28,8				9000	8490	6750						
30		29,0				9000	8550							



R (m)	ψ	RC _{max} (m)	10	15	20	25	30	35	40	45	50	55	60	Δ _h (m) Δ _h (kg)
50		12,3	18000	13720	9430	7100	5640	4640	3910	3350	2900			
45		11,7	18000	13530	9750	7560	6130	5130	4380	3800				
40		13,5	18000	15890	11370	8780	7100	5930	5050					
35		15,0		18000	12720	9750	7840	6500						
30		16,5		18000	14010	10530	8300							




MECHANISMS / 机构




POWER / 功率				Operating voltage / 工作电压	Generator / 发电机
Hoist / 起升机构	luffing / 仰臂机构	Slewing / 回转机构	Travel / 行走机构		
HFU2-65-45	LFU2-45-40	(2x) SFU-7.5	(2x) RT-7.5	400 V 3ph 50 Hz	240 kVA
HFU4-80-45					270 kVA
HFU4L-80-45					270 kVA

Optional 选项
*

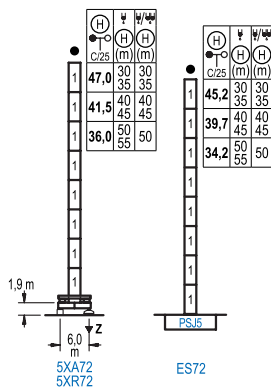


n°	Ref.	Ø	h
1	SJ25	2,0	5,5
1x SJ25 = 1x SJ25M			

R max. 最大压力	In operation 工作状态	5XR72.....111 t
	Out of service 非工作状态	5XR72.....144 t

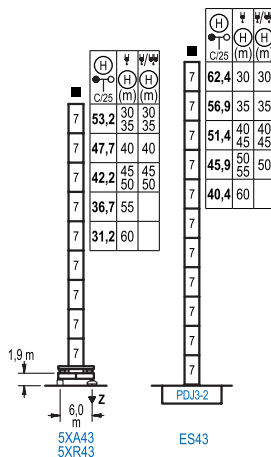


n°	Ref.	Ø	h
7	DJ33	2,5	5,5

R max. 最大反力	In operation 工作状态	5XR43.....119 t
	Out of service 非工作状态	5XR43.....167 t




	5XA72		
R	55 / 50	45 / 40	35 / 30
(m)	50	45 / 40	35 / 30
A max	23.9	29.4	34.9
A min	23.9	29.4	23.9
B max	-	16.5	22.0
B min	-	16.5	16.5
C max	28.6	28.6	34.1
H max	52.5	69.0	85.5

	ES72		
R	55 / 50	45 / 40	35 / 30
(m)	50	45 / 40	35 / 30
A max	22.1	27.6	33.1
A min	22.1	27.6	22.1
B max	-	16.5	22.0
B min	-	16.5	16.5
C max	28.6	28.6	34.1
H max	50.7	67.2	83.7



	5XA43				
R	60	55	50 / 45	40	35 / 30
(m)	-	-	50 / 45	40	35 / 30
A max	18.4	23.9	29.4	34.9	40.4
A min	18.4	23.9	23.9	23.9	23.9
B max	-	16.5	-	27.5	-
B min	-	16.5	-	16.5	-
C max	29.3	29.3	34.8	40.3	45.8
H max	47.7	64.2	80.7	97.2	113.7

	ES43				
R	60	55 / 50	45 / 40	35	30
(m)	-	50	45 / 40	35	30
A max	27.6	33.1	38.6	44.1	49.6
A min	22.1	22.1	22.1	22.1	22.1
B max	-	16.5	-	27.5	-
B min	-	16.5	-	16.5	-
C max	29.3	29.3	34.8	40.3	45.8
H max	56.9	73.4	89.9	100.9	117.4



				Hs < 300 m
	(R) (m)	(R) (m)	A max (m)	A min (m)
54.0 (4x SJ25 + TDJ23A + 4x DJ23A + CLDJ23A-1)	30 35	30 35	25.0	11.0
48.5 (3x SJ25 + TDJ23A + 4x DJ23A + CLDJ23A-1)	40	40	22.3	11.0
43.0 (2x SJ25 + TDJ23A + 4x DJ23A + CLDJ23A-1)	45 50	45	19.6	11.0
37.5 (SJ25 + TDJ23A + 4x DJ23A + CLDJ23A-1)	55	50	16.8	10.0
32.0 (TDJ23A + 4x DJ23A + CLDJ23A-1)	60		14.1	10.0

n°	Ref.	Ø	h
1	SJ25	2.0	5.5
2	TDJ23A	2.0	5.5
4	DJ23A	2.0	5.5
14	CLDJ23A-1	2.0	3.4
1x SJ25 = 1x SJ25M			

Other wind zones or additional hook heights on request
其他风区或另外的吊钩高度请咨询